


ENELTEC®

brighten your ideas

SMD 3014 LED R7S Lights

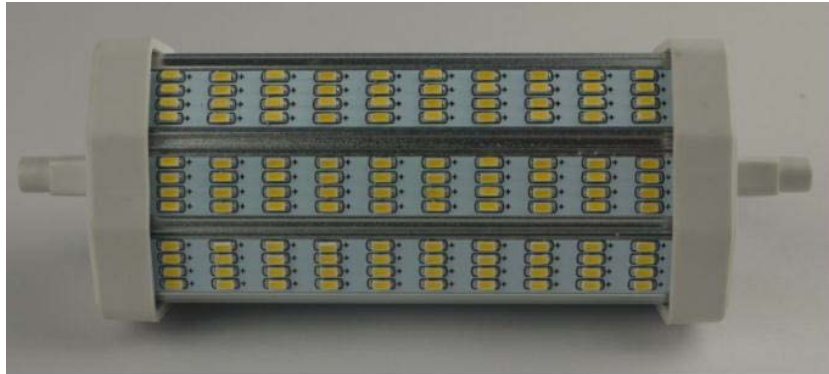


LUMENMAX LED



Specifications:

- LED: Lumenmax SMD 3014
- Beam Angle: 200°
- Voltage: 85-265VAC
- Socket: R7S
- Color: 2800-3200K / 4000-4500K / 6000-6500K
- Operating temperature: -35 to + 50°C
- Material: Aluminium Alloy Die-cast Shape
- Light Degradation: < 5% in 20,000 hours
- Warranty: 3 years



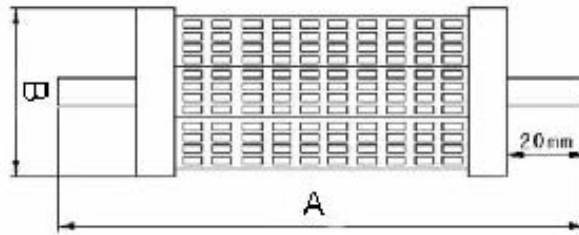

Model	Dimension(mm) AxB
ENRLG-5WR7S-01(D)	118x43x35
ENRLG-8WR7S-01(D)	118x43x35
ENRLG-10WR7S-01(D)	118x43x35
ENRLG-12WR7S-01(D)	135x43x35
ENRLG-15WR7S-01(D)	189x43x35

Applications:

High power LED bulbs are designed for use in supermarkets, jeweller's shops, advertisement box, office building, or for direct replacement of conventional lamps.

Features and advantages:

- Direct replacement of conventional lamps
- LED life of 50,000 hours continuous work
- No hazard of mercury or lead entering the environment
- Solid-state, shock and vibration resistant light sources runs on
- Major reduction in power costs, maintenance free
- Generate little heat
- No fluorescent flickering
- No danger of broken glass
- External power supply with high power factor & low harmonic current



Testing Data:

No.	Model No.	Power (W)	Lumen (LM)	LED	Beam Angle	Base	Input Voltage	PF	Color	CRI
1	ENSP-5WR7S-01	5	460	Lumenmax 3014	200°	R7S	85-265VAC	0.6	2800-3200K/ 4000-4500K/ 6000-6500K	>80
2	ENSP-5WR7S-01D	5	460 Dimmable	Lumenmax 3014	200°	R7S	85-265VAC	0.6	2800-3200K/ 4000-4500K/ 6000-6500K	>80
3	ENSP-8WR7S-01	8	700	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
4	ENSP-8WR7S-01D	8	700 Dimmable	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
5	ENSP-10WR7S-01	10	860	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
6	ENSP-10WR7S-01D	10	860 Dimmable	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
7	ENSP-12WR7S-01	12	1070	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
8	ENSP-12WR7S-01D	12	1070 Dimmable	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
9	ENSP-15WR7S-01	15	1320	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
10	ENSP-15WR7S-01D	15	1320 Dimmable	Lumenmax 3014	200°	R7S	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80



● Packing:

Model	ENRLG-5WR7S-01(D)	ENRLG-8WR7S-01(D) ENRLG-10WR7S-01(D)	ENRLG-12WR7S-01(D) ENRLG-15WR7S-01(D)
Carton (mm)	480×330×350	480×330×350	480×330×350
Quantity (PCS)	181	133	80
Net Weight/Gross Weight (Kg)	10.9/13.0	15.5/17.0	16.0/17.5

Warning:

1. It is non-waterproof.
2. Please do not touch it when they are light.
3. Please use traditional coop transformer and switch for power supply. Do not use traditional electronic transformer for power supply.
4. The angle of emitting light can be designed according to the client's requirements

